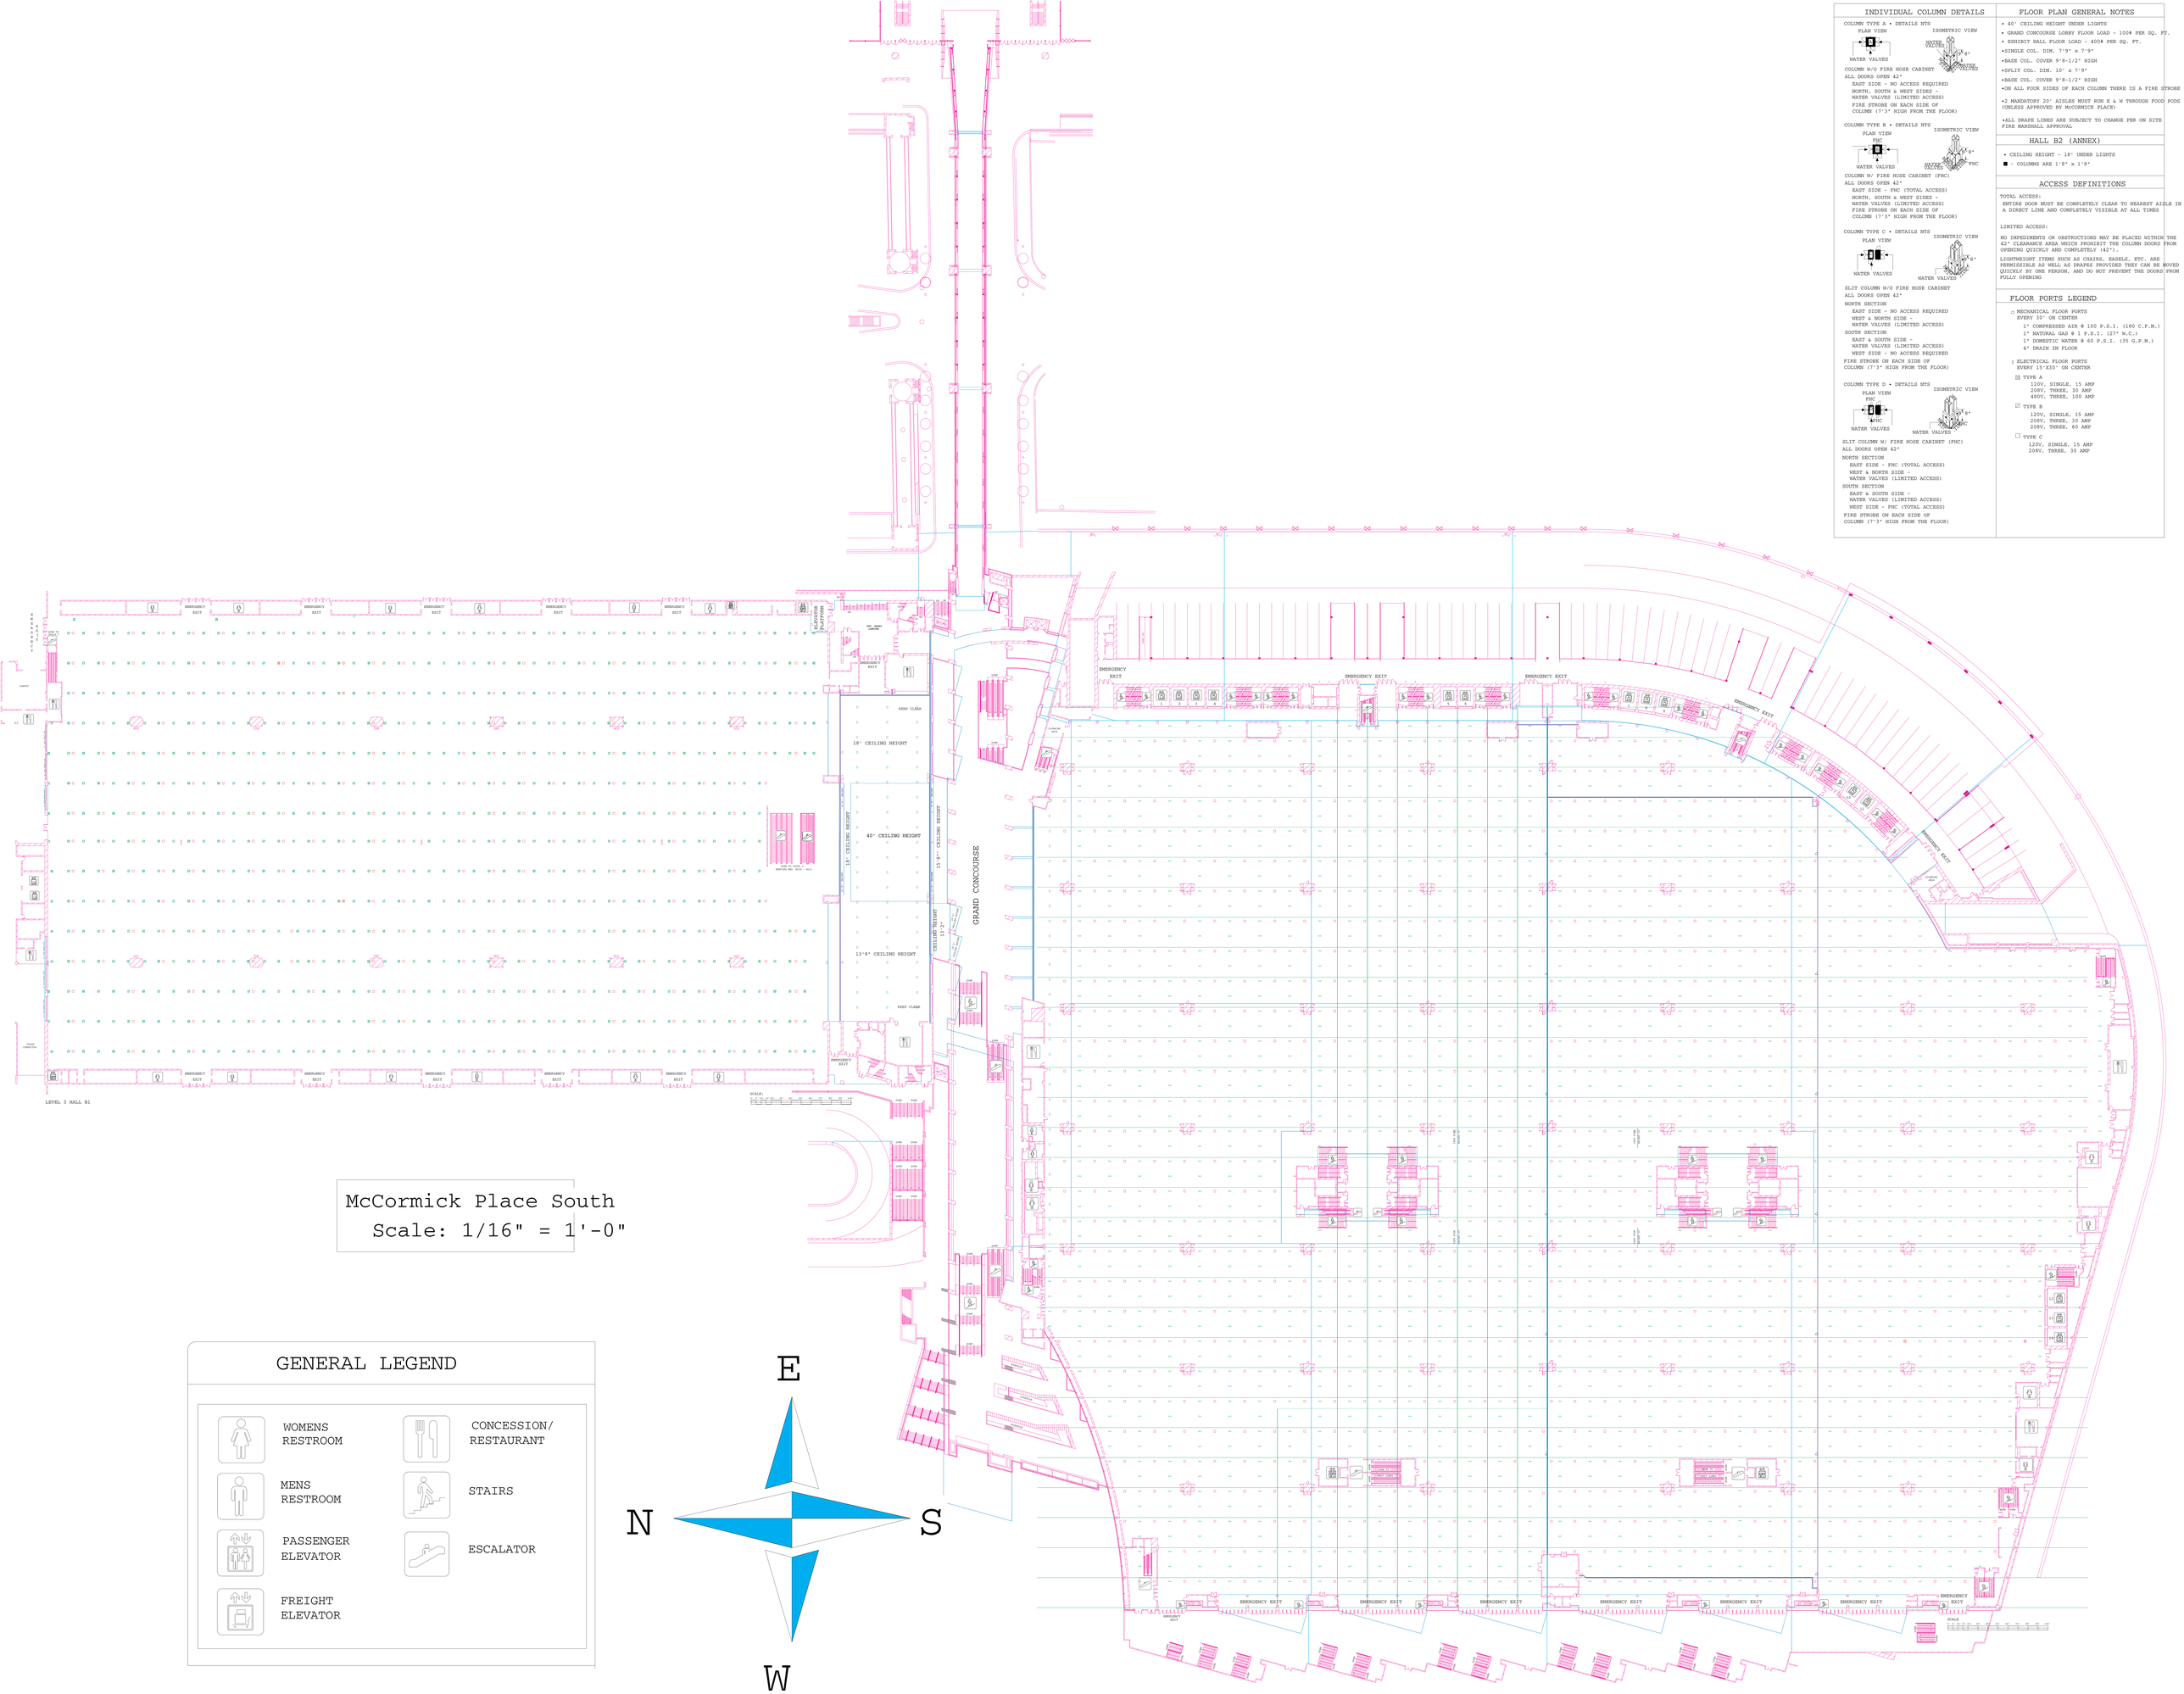

INDIVIDUAL COLUMN DETAILS

COLUMN TYPE A • DETAILS NTS

PLAN VIEW — WATER VALVES

ISOMETRIC VIEW — WATER VALVES

COLUMN W/O FIRE HOSE CABINET
ALL DOORS OPEN 42"
EAST SIDE - NO ACCESS REQUIRED
NORTH, SOUTH & WEST SIDES -
WATER VALVES (LIMITED ACCESS)
FIRE STROBE ON EACH SIDE OF
COLUMN (7'3" HIGH FROM THE FLOOR)

COLUMN TYPE B • DETAILS NTS

PLAN VIEW — FHC, WATER VALVES

ISOMETRIC VIEW — WATER VALVES, FHC

COLUMN W/ FIRE HOSE CABINET (FHC)
ALL DOORS OPEN 42"
EAST SIDE - FHC (TOTAL ACCESS)
NORTH, SOUTH & WEST SIDES -
WATER VALVES (LIMITED ACCESS)
FIRE STROBE ON EACH SIDE OF
COLUMN (7'3" HIGH FROM THE FLOOR)

COLUMN TYPE C • DETAILS NTS

PLAN VIEW — WATER VALVES

ISOMETRIC VIEW — WATER VALVES

SLIT COLUMN W/O FIRE HOSE CABINET
ALL DOORS OPEN 42"
NORTH SECTION
EAST SIDE - NO ACCESS REQUIRED
WEST & NORTH SIDE -
WATER VALVES (LIMITED ACCESS)
SOUTH SECTION
EAST & SOUTH SIDE -
WATER VALVES (LIMITED ACCESS)
WEST SIDE - NO ACCESS REQUIRED
FIRE STROBE ON EACH SIDE OF
COLUMN (7'3" HIGH FROM THE FLOOR)

COLUMN TYPE D • DETAILS NTS

PLAN VIEW — FHC, WATER VALVES

ISOMETRIC VIEW — WATER VALVES

SLIT COLUMN W/ FIRE HOSE CABINET (FHC)
ALL DOORS OPEN 42"
NORTH SECTION
EAST SIDE - FHC (TOTAL ACCESS)
WEST & NORTH SIDE -
WATER VALVES (LIMITED ACCESS)
SOUTH SECTION
EAST & SOUTH SIDE -
WATER VALVES (LIMITED ACCESS)
WEST SIDE - FHC (TOTAL ACCESS)
FIRE STROBE ON EACH SIDE OF
COLUMN (7'3" HIGH FROM THE FLOOR)

FLOOR PLAN GENERAL NOTES

- 40' CEILING HEIGHT UNDER LIGHTS
- GRAND CONCOURSE LOBBY FLOOR LOAD - 100# PER SQ. FT.
- EXHIBIT HALL FLOOR LOAD - 400# PER SQ. FT.
- SINGLE COL. DIM. 7'9" x 7'9"
- BASE COL. COVER 9'8-1/2" HIGH
- SPLIT COL. DIM. 10' x 7'9"
- BASE COL. COVER 9'8-1/2" HIGH
- ON ALL FOUR SIDES OF EACH COLUMN THERE IS A FIRE STROBE
- 2 MANDATORY 20' AISLES MUST RUN E & W THROUGH FOOD FOOD (UNLESS APPROVED BY McCORMICK PLACE)
- ALL DRAPE LINES ARE SUBJECT TO CHANGE PER ON SITE FIRE MARSHALL APPROVAL

HALL B2 (ANNEX)

- CEILING HEIGHT - 18' UNDER LIGHTS
- = COLUMNS ARE 1'8" x 1'8"

ACCESS DEFINITIONS

TOTAL ACCESS:
ENTIRE DOOR MUST BE COMPLETELY CLEAR TO NEAREST AISLE IN A DIRECT LINE AND COMPLETELY VISIBLE AT ALL TIMES

LIMITED ACCESS:
NO IMPEDIMENTS OR OBSTRUCTIONS MAY BE PLACED WITHIN THE 42" CLEARANCE AREA WHICH PROHIBIT THE COLUMN DOORS FROM OPENING QUICKLY AND COMPLETELY (42").

LIGHTWEIGHT ITEMS SUCH AS CHAIRS, EASELS, ETC. ARE PERMISSIBLE AS WELL AS DRAPES PROVIDED THEY CAN BE MOVED QUICKLY BY ONE PERSON, AND DO NOT PREVENT THE DOORS FROM FULLY OPENING

FLOOR PORTS LEGEND

☐ MECHANICAL FLOOR PORTS
EVERY 30' ON CENTER
1" COMPRESSED AIR @ 100 P.S.I. (180 C.F.M.)
1" NATURAL GAS @ 1 P.S.I. (27" W.C.)
1" DOMESTIC WATER @ 60 P.S.I. (35 G.P.M.)
4" DRAIN IN FLOOR

☐ ELECTRICAL FLOOR PORTS
EVERY 15'X30' ON CENTER

☒ TYPE A
120V, SINGLE, 15 AMP
208V, THREE, 30 AMP
480V, THREE, 100 AMP

☑ TYPE B
120V, SINGLE, 15 AMP
208V, THREE, 30 AMP
208V, THREE, 60 AMP

☐ TYPE C
120V, SINGLE, 15 AMP
208V, THREE, 30 AMP

McCormick Place South
Scale: 1/16" = 1'-0"

GENERAL LEGEND

- WOMENS RESTROOM
- MENS RESTROOM
- PASSENGER ELEVATOR
- FREIGHT ELEVATOR
- CONCESSION/ RESTAURANT
- STAIRS
- ESCALATOR

E
N
S
W